


I	۵	н <b>т</b>	m	0

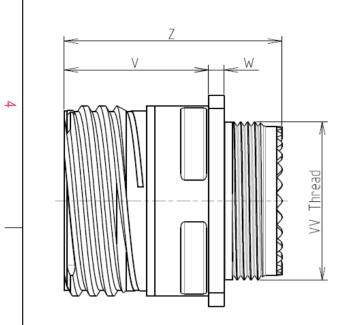

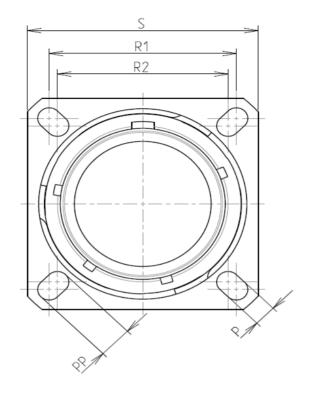



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray -Mass : 11.73 g ± 10%

8D 0

G

11

F

98

А

F

С

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-98

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

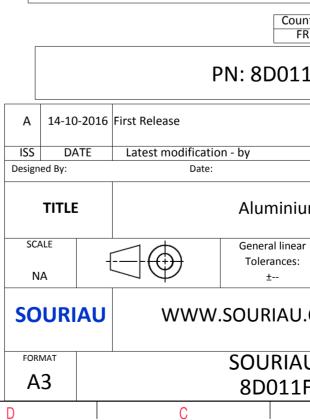

σ		А			
				4	
AS EXAMPLE				3	
any non-conformin which does not co or of the Parties or I adation, technical n untry Jurisc FR	mply with by a third par			2	
1F98AC					
	CUSTOME	R DRAWING	MOD N°	<u> </u>	
um Receptacle 8D series					
ar	NPRDS / PROJECT 859				
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N° F98AC-C			SHEET 1/2		
B		А		J	

r	т	۵	нт. П	m	D	0	
		Contact Layout				Panel Cuto	out
4	-×	$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ $				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Cont positi A B C C D E E F Shell Arrangement size no. conta	+.000 (0.00)  +.130 (3.30)    +.130 (3.30)  +.000 (0.00)    +.065 (1.65) 113 (2.87)   065 (1.65) 113 (2.87)   130 (3.30)  +.000 (0.00)    +.000 (0.00)  +.000 (0.00)    er of  Size  Service  Contact  Supersedes	1		2		C
cu	<u>size</u> no. conta 11 -98 6					Dim ØA ØAA	
						R1 ØT	
	F						
						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommenda	vhi of
N						Coun FR	
						PN: 8D011	- <b>I</b> .
					ISS DA	-	
					Designed By:	Date:	
					SCALE	Aluminiu General linear	m 
					NA	Tolerances:	
					SOURI	AU WWW.SOURIAU.	C
					FORMAT	SOURIAU 8D011F	
	Н	G	F	E	D	C	_

