
т	۵	<b>п</b>	m	0







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	: -65°C to +175°C		
-Salt Spray	: 2000 hours		

: 11.6 g ± 10%

8D 0

G

11

J

22

В

F

D

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V'	19.5+1.4/-0	
W'	2.1/3.65	
Ζ'	32 Max	
VV THREAD	M15x1-6g	


ORIENTATION : D

CONTACT LAYOUT : 11-22

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

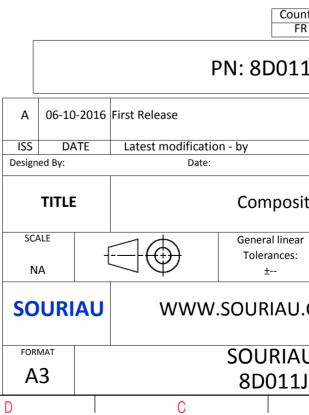

Ξ		A	
			4
AS EXAMPLE			3
any non-conformi s which does not co er of the Parties or adation, technical r untry Juriso TR 1J22BD	omply with by a third party		2
		MOD N°	
ar	CUSTOMER DRAWII le 8D series NPRDS / PROJECT 859		1
I.COM	This document is the property of		
U DRG N°	1	SHEET	
J22BD-C		1/2 A	J

4	(	Contact Layout 22*			28	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc A B C	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905 -1.905 -1.905			¥	Dim
3	D	-1.905 1.905	]			ØA ØAA R1 ØT
2	<b>F</b>					SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment Court F
					A 06-10- ISS DAT	PN: 8D01
					Designed By: TITLE SCALE	Date: Composi General linear Tolerances:
1					NA SOURIA FORMAT A3	WWW.SOURIAU SOURIA
	Н	G	F	E	D A3	8D011
					V	

Т

ш

т

G

0

