
—	۵	بر (m	0





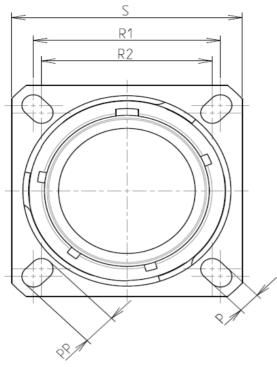

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ω

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy $0.8 \mu m$ minimum : 500 Mating cycles -Durability -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C

: 500 hours

: 32.41 g ± 10%

8D 0

G

11

-

Κ

04

В

F

В

Connector dir Dim Р PP R1 R2 S V W Ζ VV THREAD

т		D		0		Φ		>
~					YOUT SHOWN AS			
ple Connector dimension im Nominal	7							
P 3.25±0.2 P 4.93±0.2 11 20.62 12 18.26 15 26.2±0.3 V 20.83+0/-1.25	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)							
V 2.1/2.5 Z 31.5 Max	-	Country Jurisdiction & Control List FR Not Listed						
IREAD M15x1-6g		PN: 8D011K04BB						
		A 06-1	0-2016	First Release				
		ISS D. Designed By:	ATE	Latest modificatio Date:	on - by		CUSTOMER DRAWI	MOD N°
	TITLE Stainless Steel Receptacle 8D series							
		SCALE NA	-		General linear Tolerances: ±		NPRDS / PROJECT 859	Г
ORIENTATION : B SOURIA		IAU	WWW.SOURIAU.COM This document is the production of the source of the sourc			AU produced or		
CONTACT LA	ACT LAYOUT : 11-04			SOURIAU DRG N°			1	SHEET
E	1	A3	 	С	80011	KO4BB-C		1/2 A
L \	\bigvee	0	1	U	I	U	Ι	

-	Ŧ	۵	н г	m		0
		Contact Layout				Panel Cutou
4	×.	$ \begin{array}{c} $			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numb size no. conta 11 -4 4	X-axis (mm) Y-axis (mm) + 065 (1.65) + 065 (1.65) + 065 (1.65) - 065 (1.65) - 065 (1.65) - 065 (1.65) - 065 (1.65) + 065 (1.65) er of Size Service contacts rating location]		₩ ₩	ØT
ω						Dim ØA ØAA R1 ØT
	L					
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D011
						016 First Release
_					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Stainless Ste
_ _					SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D011K(
L	Н	G	F	E	D	C

