


т	G		. m		
 			-	_	

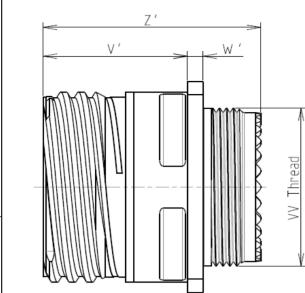

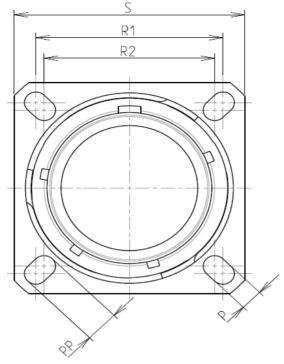



CHARACTE

4

_

ω

 \sim

_

D I	т (П		0	Φ	A		 1
Z'	S R1 R2 V V V V V V V V V V V V V V V V V V			NAS EXAMPLE			4
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	Keying Shown as example Connector dimension Dim Nominal						
-Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy	P 3.25±0.2 PP 4.93±0.2 R1 20.62 R2 18.26 S 26.2±0.3 V' 19.5+1.4/-0	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)					
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum	W' 2.1/3.65 Z' 32 Max				on & Control List lot Listed		2
-Durability : 500 Mating cycles VV THREAD M15x1-6g -Delivered with Souriau contacts and Accessories			PN: 8D011M05HA				
-Temperature Range : -65°C to +200°C -Salt Spray : 2000 hours		A 07-10-2016	5 First Release]	
		ISS DATE Designed By:	Latest modification - by Date:		CUSTOMER DRAWING	MOD N°	
		TITLE	Comp	osite Receptacle	8D series		
BASIC SERIES: 8D 0 - 11 M 0 SHELL TYPE : Square Flange Receptacle	5 Н А	SCALE	General li Toleranc ±		NPRDS / PROJECT 859		-
SHELL TYPE : Square Flange Receptacie CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 CONTACT TYPE : PIN (1500 Matings)			A SOURIAU WWW.SOURIAU.COM This document is the proper SOURIAU it must not be reproduced			ed or	
PLATING : M = Nickel	CONTACT LAYOUT : 11	05 FORMAT A3		IAU DRG N° 1M05HA-C		SHEET 1/2	
H G	F E	D	<u> </u>	B	A]

ſ	тт	۵	нт — — — — — — — — — — — — — — — — — — —	т		0	
		Contact Layout				Pa	anel Cutou
4	-×	$ \begin{array}{c} & & & \\ & $			٨	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conta positio ID A B C C D E Shell Arrangement size no. conta	X-axis (mm) Y-axis (mm) +.065 (1.45) +.056 (1.42) +.113 (2.87) 065 (1.65) +.000 (0.00) 130 (3.30) 113 (2.87) 065 (1.65) 065 (1.65) +.056 (1.42) er of Size Service Contact Supersedes]		¥ ~~~~	Ø	<u>ŏT_</u>
ى	11 -5 5	20 I All MS20050-5				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lial due to a use of the Pro the Specifications issued by (professional reco	oducts wh y either of
N						PN: 8D	Countr FR 0011N
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
					SCALE		nposite
→					NA		rances: ±
					FORMAT		
					A3	8D0	JRIAU D11M
	Н	G	F	E	D	С	

