				 -
Ŧ	Q	нт – – – – – – – – – – – – – – – – – – –	m	C C







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	65℃ to +175℃			
-Salt Spray	: 500 hours			

: 14.95 g ± 10%

8D 0

G

11

W

01

В


F

Ν

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

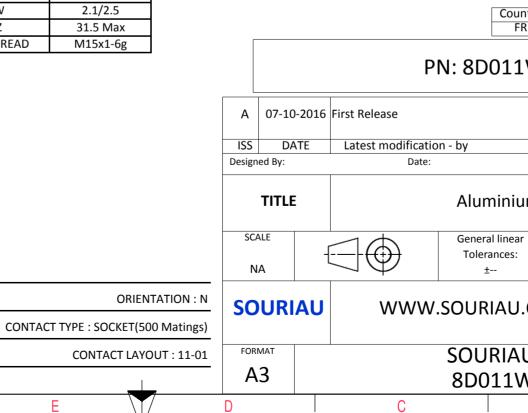

	σ		A			
					4	
S EXA	AMPLE				3	
s which er of t indation untry FR	non-conformit ch does not co he Parties or to on, technical n Jurisc	mply with by a third par			2	
				MOD N°		
		CUSTOME	R DRAWING			
um	n Receptacle 8D series					
ar :	NPRDS / PROJECT					
	859					
I.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
U I	DRG N°	I		SHEET		
W0	1BN-C			1/2		
	В		А			

		۵	н П	m	D	0	
		Contact Layout				Panel Cu	itout
4		01			Å	SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Ctc	1#12 11-01 X Y]		M 27	ØA_ØT_	5
ω	A	0 0]			Dim ØA ØAA R1 ØT	
						SOURIAU shall not be liable for due to a use of the Products the Specifications issued by eithe (professional recommen	whi er of
C							R
					A 07-10-20 ISS DATE Designed By:	PN: 8D011	
-					TITLE SCALE NA	Aluminiu General linea Tolerances: ±	ar
					FORMAT	U WWW.SOURIAU SOURIA	
			-	- 1	A3	8D011\	
	Н	G	F	E	D	C	

