т	വ	н п	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium	
-Shell Plating	: Olive drab Cadmium	
-Insulator	: Thermoplastic	
-Contacts	: Copper Alloy	
-Seals & Grommet	: Silicon Elastomer	
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum	
-Durability	: 500 Mating cycles	
-Delivered with Souriau contacts and Accessories		
-Temperature Range	: -65°C to +175°C	
-Salt Spray	: 500 hours	

: 11.5 g ± 10%

8D 0

G

11

W

22


А


F

В

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
РР	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M15x1-6g	

Е



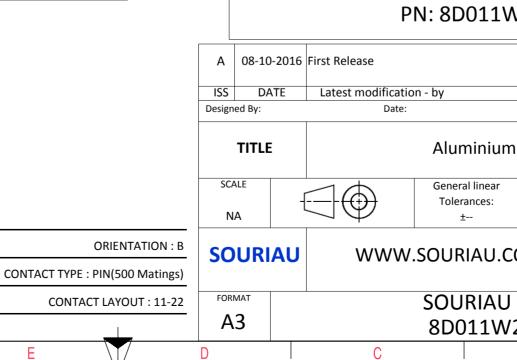

Φ	Þ				
		4			
S EXAMPLE		3			
any non-conformit which does not co or of the Parties or b dation, technical no intry Jurisd	mply with by a third party	2			
	MOD N°	_			
um Receptacl	m Receptacle 8D series				
ır	NPRDS / PROJECT 859				
COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N° W22AB-C	SHEET 1/2				
В	A	L			

		Contact Layout				Panel Cut
4	(22*			Z	QUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc A B	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905			<u></u>	ØT ØT
ယ	C D	-1.905 -1.905 -1.905 1.905				Dim ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment
2						PN: 8D011
					A 08-10-201 ISS DATE Designed By:	6 First Release Latest modification - by Date:
-					SCALE NA	Aluminiu General linear Tolerances: ±
					FORMAT A3	SOURIA
	Н	G	F	E	D	8D011\ C
					W	

Т

ш

т

G

0

