

–		–	 _	
<u>_</u>	<u>رن</u>		 0	0



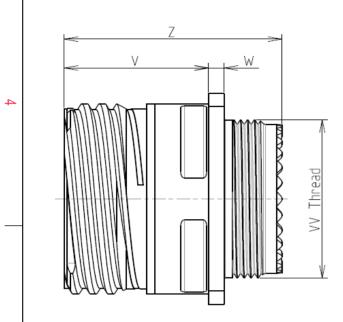

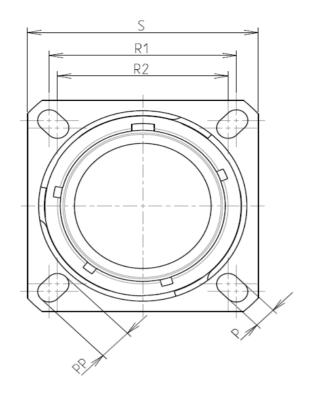

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
	-Shell Plating	: Black Zinc Nickel			
	-Insulator	: Thermoplastic			
-Contacts : Copper Alloy					
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
	-Durability : 500 Mating cycles				
	-Delivered without Souriau contacts				
	-Temperature Range	-65℃ to +175℃			
	-Salt Spray	: 500 hours			

: 11.22 g ± 10%

8D 0

G

11

Ζ

22

Ρ

F


А L


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

ORIENTATION : A

CONTACT TYPE : PIN(500 Matings)

Е



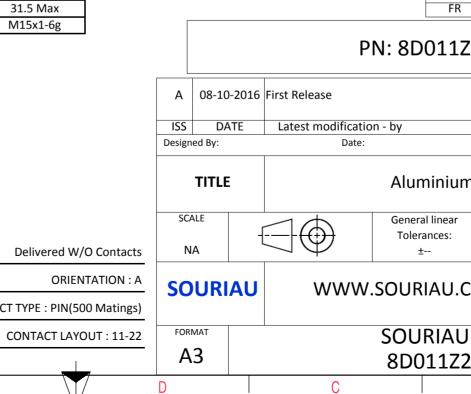

	Φ		A			
					4	
DWN AS EXA	AMPLE				3	
ble for any non-conformity or damage oducts which does not comply with y either of the Parties or by a third party mmendation, technical notice.) Country Jurisdiction & Control List FR Not Listed						
		CUSTOM	ER DRAWING	MOD N°	· ·	
minium Receptacle 8D series						
ral linear rances: ±			/ PROJECT 859		1	
RIAU.COM						
	DRG N° 2PAL-C			SHEET 1/2		
	B		A		J	

4	(Contact Layout 22*			22 -	Panel Cut SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc A B C	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905 -1.905 -1.905			¥	Dim
ω	D	-1.905 1.905				ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend
S					A 08-10-202	PN: 8D011
					ISS DATE Designed By:	Latest modification - by Date: Aluminiu
_					SCALE NA	General linear Tolerances:
					FORMAT A3	J WWW.SOURIAU SOURIA 8D0112
	Н	G	F	E	D	C

Т

ш

т

G

0

