

т	۵	<b>п</b>	m	0



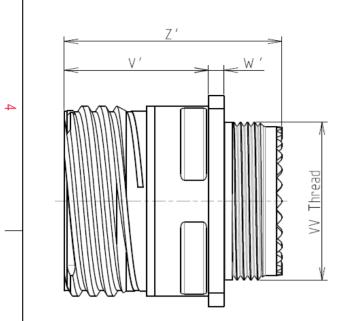

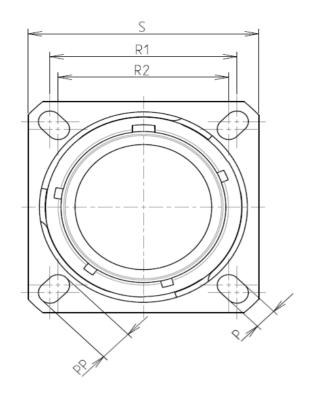

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 2000 hours			

: 12.7 g ± 10%

8D 0

G

13

J

26

Ρ

F

N L

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M18x1-6g		

Delivered W/O Contacts


CONTACT LAYOUT : 13-26

CONTACT TYPE : PIN(500 Matings)

Е

**ORIENTATION : N** 

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

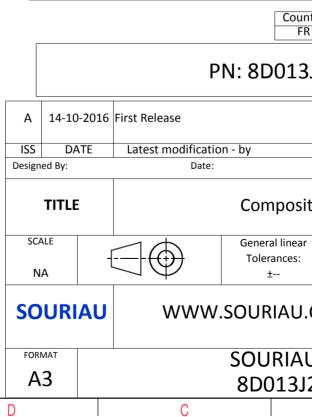

	Φ		A			
					4	
					3	
	MPLE	ty or damage				
whic er of t	any non-conformity or damage which does not comply with r of the Parties or by a third party dation, technical notice.)					
Intry R	y Jurisdiction & Control List Not Listed				2	
3J26PNL						
		CUSTOME		MOD N°		
ite	e Receptacle 8D series					
ar			PROJECT			
	859 1   This document is the property of					
	.COM SOURIAU it must not be reproduced or communicated without permission					
			SHEET			
170	PNL-C		A	1/2	J	

-	I	G	н <b>г</b>	m	D	0
		Contact Layout				Panel Cutou
4	(	26 °			A 	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		6#22D			¥	
ω	Ctc A B C D E F 1 2	13-26       X     Y       0     3.47       2.47     4.34       2.47     -4.34       0     -3.47       -2.47     -4.34       -2.47     -4.34       3.25     0       -3.25     0				Dim ØA ØAA R1 ØT
	F					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
						PN: 8D013J
					A 14-10-201 ISS DATE	16 First Release Latest modification - by
					Designed By:	Date:
					TITLE	Composite
					SCALE NA	General linear Tolerances: ±
					SOURIAU	J WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013J2
L	Н	G	F	E	D	C

