


Ŧ	Ω (п	m	<u>с</u>

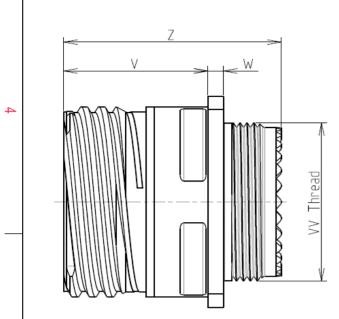

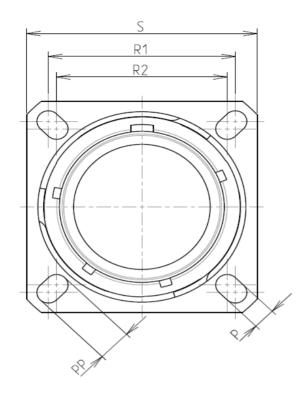



LAYOUT SHOWN AS

Keying Shown as example

L

Е

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Stainless Steel			
-Shell Plating	: Passivated			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	-65°C to +200°C			
-Salt Spray	: 500 hours			

8D 0

G

13

Κ


03


Ρ

F

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		

Е



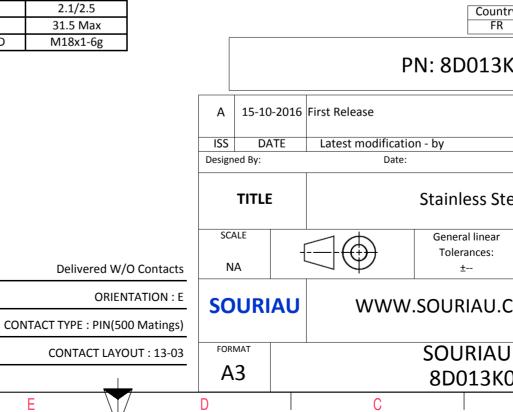

σ		Þ		
R			4	
AS EXAMPLE			3	
any non-conform s which does not of er of the Parties of ndation, technical untry Juri FR 3KO3PEL	comply with r by a third party	ist	2	
	CUSTOMER DR/	MOD N° AWING		
Steel Receptacle 8D series				
ar :	NPRDS / PROJECT 859			
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
UDRG N° SHEET KO3PEL-C 1/2				
B		Α	J	

-	<u>т</u>	۵	гт —	m	D	0		
		Contact Layout				SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	Panel Cuto	
4		3#16			2			
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47			4		ΔA Dim	
دى						ç	ØA ØAA R1 ØT	
	-					SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda		
N						PN:	Count FR : 8D013I	
					A 15-10-2 ISS DATE Designed By:	D16 First Release Latest modification - I Date:	by	
					TITLE SCALE NA		General linear Tolerances: ±	
					SOURIA			
		T	I		FORMAT A3	3	OURIAL 8D013K	
	Н	G	F F	E	D	C		

