


Ŧ	D D	п	m	<b>O</b>
[]				



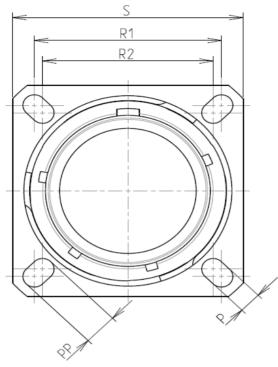



## CHARACTERISTICS

4

ω

 $\sim$ 

\_

T   G	П	т			0	D	A		
Z V V V V V V V V V V V V V V V V V V V	S R1 R2 R2					OWN AS EXAMPLE			4
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	Keying Shown as	example Connector dimension Dim Nominal							
-Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy		P         3.25±0.2           PP         4.93±0.2           R1         23.01           R2         20.62           S         28.6±0.3           V         20.83+0/-1.25			due to a use of the P the Specifications issued I	able for any non-conformit roducts which does not cor by either of the Parties or b ommendation, technical no	mply with y a third party		
<ul> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Alloy 0.8μm minimum</li> <li>-Durability : 500 Mating cycles</li> <li>-Delivered with Souriau contacts and Accessories</li> </ul>		W         2.1/2.5           Z         31.5 Max           VV THREAD         M18x1-6g			PN: 8	Country Jurisd FR SD013S03AE	iction & Control List Not Listed		2
-Temperature Range : -65°C to +200°C -Salt Spray : 500 hours				A 15-10-2016	First Release			MOD N°	
				Designed By: TITLE	Date:	nless Steel Recepta	customer drawing		
BASIC SERIES:     8D     0     -     13     S       SHELL TYPE     : Square Flange Receptacle     -     -     13     S	03 A E			SCALE NA		eral linear erances: ±	NPRDS / PROJECT <b>859</b> This document is the pro	operty of	1
CONTACT TYPE       : Standard Crimp Contact       ORIENT.         SHELL SIZE : 13       CONTACT TYPE : PIN(500         PLATING       : S = Nickel       CONTACT LAYOU				FORMAT		SOURIAU.COM it must not be reprod communicated without p SOURIAU DRG N°			
H G I	F	E	7	A3		D013S03AE-C	A	1/2	

Contact Layout		Panel Cuto
Saux 3#16	JARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	_
13-03       Ctc     X     Y       A     2.39     1.47       B     0     -2.79       C     -2.39     1.47		
	ØA ØA R1 ØT	A A
	SOURIAU shall not be due to a use of the the Specifications issued (professional re	Products w d by either o
		Count FR
	PN: 3	8D013
A 15-10-2016	First Release	
ISS DATE Designed By:	Latest modification - by Date:	
TITLE	Stai	inless St
SCALE		neral linear olerances: ±
SOURIAU	WWW.SOL	JRIAU.
FORMAT A3	SO 8	URIAU D013S
H G F E D	C	

