

—	G	н п	m	O





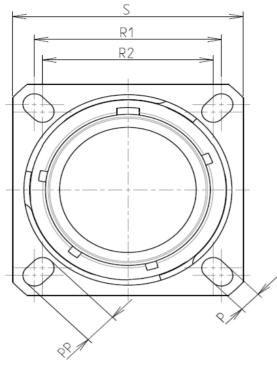

CHARACTERISTICS

4

ω

 \sim

_

T Q T	Π	D	0	₿ >		
	S R1 R2 I I I I I I I I I I I I I I I I I I			MMPLE		4
CHARACTERISTICS	Connector dimension					
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy	Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 23.01 R2 20.62 S 28.6±0.3 V 20.83+0/-1.25	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum -Durability : 500 Mating cycles	W 2.1/2.5 Z 31.5 Max VV THREAD M18x1-6g		PN: 8D013S	Jurisdiction & Control List Not Listed		2
-Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C -Salt Spray : 500 hours			First Release			_
		ISS DATE Designed By: TITLE	Latest modification - by Date: Stainless Stee	customer drawing el Receptacle 8D series	MOD N°	
BASIC SERIES: 8D 0 - 13 S 03 B C SHELL TYPE : Square Flange Receptacle I		SCALE	General linear Tolerances:	NPRDS / PROJECT 859		1
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	ORIENTATION : C CONTACT TYPE : SOCKET(500 Matings)				ced or ermission	
PLATING : S = Nickel	CONTACT LAYOUT : 13-03	FORMAT A3	SOURIAU [8D013S03		SHEET 1/2	

Contact Layout		Panel Cuto
Saux 3#16	JARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	_
13-03 Ctc X Y A 2.39 1.47 B 0 -2.79 C -2.39 1.47		
	ØA ØA R1 ØT	A A
	SOURIAU shall not be due to a use of the the Specifications issued (professional re	Products w d by either o
		Count FR
	PN: 3	8D013
A 15-10-2016	First Release	
ISS DATE Designed By:	Latest modification - by Date:	
TITLE	Stai	inless St
SCALE		neral linear olerances: ±
SOURIAU	WWW.SOL	JRIAU.
FORMAT A3	SO 8	URIAU D013S
H G F E D	C	

