


Ŧ	۵	п	m	0
'				



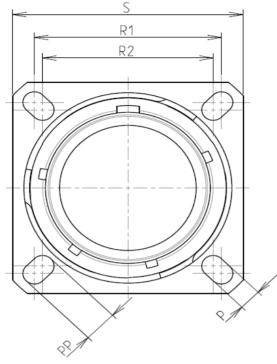



## CHARACTERISTICS

4

ω

 $\sim$ 

\_

ב   ב		D	0	₽	A		
	S R1 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2			SEXAMPLE			4
CHARACTERISTICS Standard : Based on MIL-DTL-38999 Series III	Keying Shown as example           Connector dimension           Dim         Nominal						
-Shell Material: Stainless Steel-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy	P         3.25±0.2           PP         4.93±0.2           R1         23.01           R2         20.62           S         28.6±0.3           V         20.83+0/-1.25	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)					
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles	W         2.1/2.5           Z         31.5 Max           VV THREAD         M18x1-6g		PN: 8D01	R	ion & Control List Not Listed		2
-Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C -Salt Spray : 500 hours			First Release				-
		ISS DATE Designed By: TITLE	Latest modification - by Date: Stainless S	Steel Receptacl	e 8D series	MOD N°	
BASIC SERIES:     8D     0     -     13     S     03       SHELL TYPE     : Square Flange Receptacle	3 B D	SCALE	General linea Tolerances:		NPRDS / PROJECT 859		-
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	ORIENTATION : D CONTACT TYPE : SOCKET(500 Matings)	SOURIAU         SOURIAU         SOURIAU           atings)         SOURIAU         WWW.SOURIAU.COM         it must not be communicated with the communicated withe communicated with the communicated with the communic			This document is the prop SOURIAU it must not be reproduce communicated without per	AU eproduced or hout permission	
PLATING : S = Nickel	F E	A3		U DRG N° S03BD-C B	A	SHEET 1/2	

		۵	н <b>т</b>	m	D	0	
		Contact Layout				SQUARE FLANGE RECEPTACLE REAR MOUNTING	Panel Cuto
4		3#16					
	Ctc A B C	13-03           X         Y           2.39         1.47           0         -2.79           -2.39         1.47					Dim
ယ							ØA ØAA R1 ØT
	_						
	3					due to a use the Specifications	not be liable for ar of the Products w s issued by either o onal recommenda
N							Count FR
						F	PN: 8D013
					A 15-	10-2016 First Release	
					ISS Designed By	DATE Latest modification	on - by
					тіт	E	Stainless St
<u> </u>					SCALE		General linear Tolerances: ±
					SOUF	NWW WAR	.SOURIAU.(
					FORMAT A3		SOURIAU 8D013S
l	Н	G	F	E	D	C	

