

| T | G | нт. П | m | 0 |
|----------|---|----------|---|---|



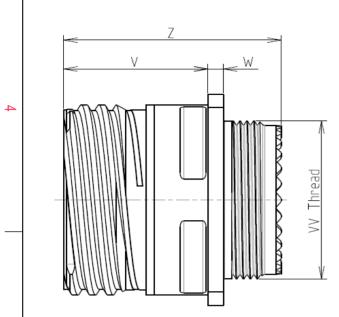

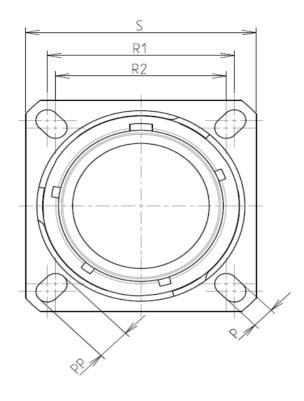

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 500 hours -Salt Spray

: 37.94 g ± 10%

8D 0

G

13

S

04

D


А

F

| Connector dimension | | | | |
|---------------------|---------------|--|--|--|
| Connector dimension | | | | |
| Dim | Nominal | | | |
| Р | 3.25±0.2 | | | |
| PP | 4.93±0.2 | | | |
| R1 | 23.01 | | | |
| R2 | 20.62 | | | |
| S | 28.6±0.3 | | | |
| V | 20.83+0/-1.25 | | | |
| W | 2.1/2.5 | | | |
| Z | 31.5 Max | | | |
| VV THREAD | M18x1-6g | | | |

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

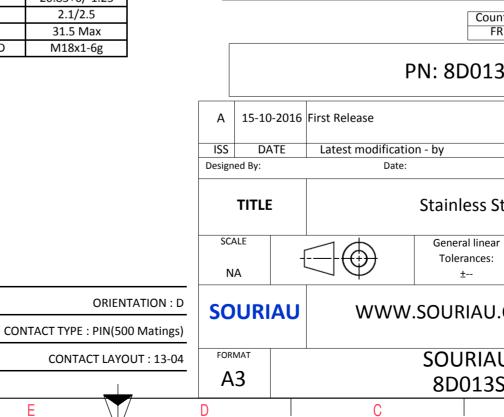

| σ | | А | | | |
|---|----------------------------------|-----------|--------|---|--|
| R | | | | 4 | |
| AS EXAMPLE | | | | 3 | |
| any non-conformi s which does not co er of the Parties or I ndation, technical n untry Jurisc FR 3SO4AD | mply with by a third par | ty | | 2 | |
| | | | | | |
| | CUSTOME | R DRAWING | MOD N° | | |
| Steel Receptacle 8D series | | | | | |
| ar | NPRDS / PROJECT 859 | | | | |
| J.COM | This document is the property of | | | | |
| U DRG N° S04AD-C | 1 | | SHEET | | |
| B | | A | , | J | |
| 5 | | | | | |

| | <u> </u> | ۵ | н т | т | D | 0 | |
|----------|--|--|------------|---|--------------------------------------|--|------------------|
| | | Contact Layout | | | | Panel C | utou |
| 4 | | X D D D D D D D D | | | Ā | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING | |
| | Cont positio A B C D Shell Arrangement N size no. | (Insert arrangement 13-4) Location (mm) V-axis (mm) 4 +.000 (0.00) +.150 (3.81) +.146 (3.71) +.035 (0.89) :: +.000 (0.00) 083 (2.11) : +.036 (0.89) | | | * 87 | | Ē |
| ယ | | | | | | Dim ØA ØAA R1 ØT | |
| | | | | | | SOURIAU shall not be liable fo due to a use of the Product the Specifications issued by eith (professional recommen | ts whi ner of |
| 0 | | | | | | PN: 8D01 | FR |
| | | | | | A 15-10-2 ISS DAT Designed By: | 2016 First Release | |
| | | | | | SCALE | Stainless General line | ear |
| _ | | | | | NA SOURIA | Tolerances ± | |
| | | | | | FORMAT A3 | SOURIA 8D013 | AU |
| | Н | G | F | E | D | C | |

