


T	G	нт — — — — — — — — — — — — — — — — — — —	m	0

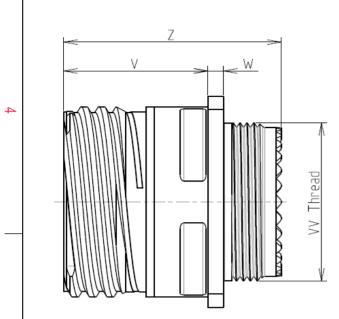

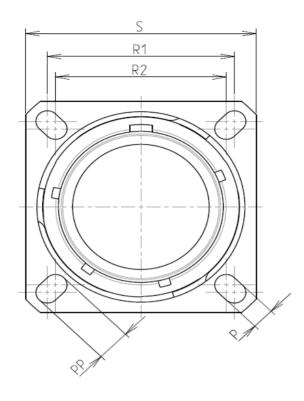



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 500 hours -Salt Spray

: 37.98 g ± 10%

8D 0

G

13

S

98

А


F

D

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 23.01 R1 20.62 R2 S 28.6±0.3 V 20.83+0/-1.25 W 2.1/2.5 31.5 Max Ζ VV THREAD M18x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

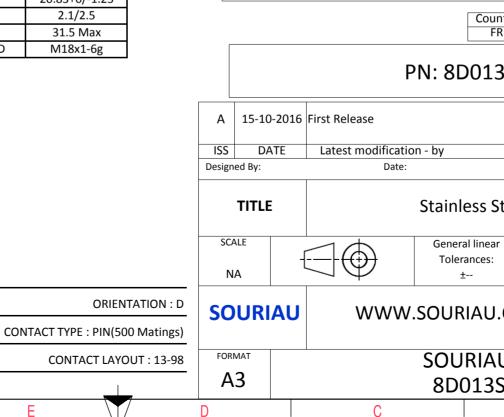

B					
		4			
		3			
AS EXAMPLE		0			
s which does not comply with er of the Parties or by a third party ndation, technical notice.)					
Intry Jurisdiction & Control List FR Not Listed		2			
3S98AD					
CUSTOMER DRAWING	MOD N°				
Steel Receptacle 8D series					
ar NPRDS / PROJECT					
859		1			
This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°	SHEET				
B A	1/2	J			

		۵	г П	m		0	
		Contact Layout					Panel Cutout
4		$x_{1} \begin{pmatrix} \bullet & \bullet \\ \bullet \\$			A T	SQUARE FLANGE RECEPTACLE (T REAR MOUNTING	YPE 0)
	Contr positio A B C C D C C D C G G H J J	n ID (mm) (mm) + 000 (0.00) +.195 (4.95) + 1.25 (3.18) +.150 (3.81) + 1.25 (3.18) +.030 (0.76) + 1.93 (4.90) +.030 (0.76) - 1.04 (4.17) 105 (2.67) - 1.93 (4.90) +.030 (0.76) - 1.93 (4.90) +.030 (2.67) - 1.93 (4.90) +.030 (3.81) - 1.93 (4.90) +.030 (3.81) + 0.90 (5.165) 015 (0.38)					
ω	size no.	065 (1.65) 015 (0.38) Number of contacts Service rating Contact location Supersedes 10 20 I All MS20051-96					Dim ØA ØAA R1 ØT
						due to a use on the Specifications	ot be liable for any of the Products whi issued by either of mal recommendation
N							Country FR
						Р	N: 8D013S
					A 15-10-201 ISS DATE Designed By:	6 First Release Latest modification Date:	ו - by
					TITLE		Stainless Ste
<u> </u>					SCALE NA		General linear Tolerances: ±
					SOURIAL	J WWW.	SOURIAU.C
					FORMAT A3		SOURIAU 8D013S9
	Н	G	F	E	D	С	

