	I	Q	н т	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Without Plating			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65℃ to +175℃			

: 2000 hours

: 19.2 g ± 10%

8D 0

G

13

Х

08

В


F

А

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M18x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

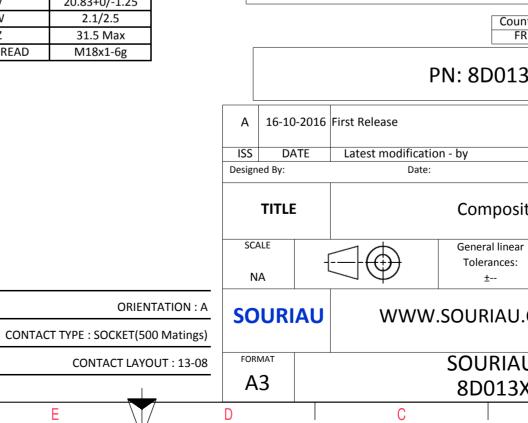

						1		
	Ξ			A				
						4		
		5				3		
	AMPLE	y or doe	1299					
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)								
antry R 3X (Jurisdiction & Control List Not Listed							
		CUST		WING	MOD N°			
site	customer drawing Receptacle 8D series							
ar :	NPRDS / PROJECT 859							
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						1		
	DRG N° 8BA-C				SHEET 1/2			
	B			Α		J		

	工	۵	ات	m	U	0	
		Contact Layout					Panel Cutout
4	-x	$ \begin{pmatrix} & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & &$			A	SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Com positi II A B C C D C C D C C C C C C C C C C C C C	Uion D X-axis (mm) Y-axis (mm) A +.065 (1.65) +.157 (3.99) B +.170 (4.32) +.000 (0.00) C +.120 (3.05) 120 (3.05) D .000 (0.00) 170 (4.32) E 120 (3.05) 120 (3.05) F 170 (4.32) +.000 (0.00) S 065 (1.65) +.157 (3.99)			₩ ₩	ØA	- 2
သ		mber of Size Service Contact Supersedes ntacts contacts rating location 8 20 I All MS20051-8				Din ØA ØA R1 ØT	A A
						SOURIAU shall not be due to a use of the the Specifications issued (professional re	Products whi by either of
2						PN: :	Country FR 8D013X
					A 16-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
_					TITLE SCALE NA	Ge	neral linear blerances:
					SOURIA		
					FORMAT A3		URIAU D013X0
	Н	G	F	E	D	С	

