
 (L)	 	0	0







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 15

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Stainless Steel
-Shell Plating	: Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	u contacts and Accessories
-Temperature Range	-65°C to +200°C
-Salt Spray	: 500 hours

: 45.69 g ± 10%

8D 0

G

15

S

05

А

F

D

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.39±0.2			
R1	24.61			
R2	23.01			
S	31±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M22x1-6g			


ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 15-05

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

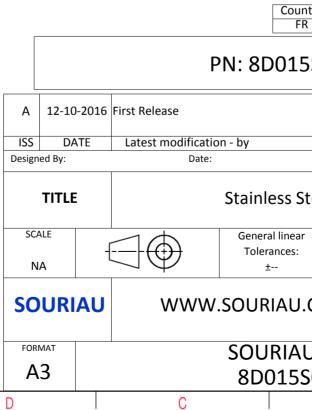

	7			
	4			
AS EXAMPLE	3			
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)				
Untry Jurisdiction & Control List FR Not Listed	2			
5S05AD				
MOD N°				
customer drawing				
ar NPRDS / PROJECT				
859   This document is the property of	1			
.COM SOURIAU it must not be reproduced or communicated without permission				
UDRG N° SHEET				
B A 1/2				

		۵	н <b>т</b>	m	D	0	
		Contact Layout					Panel Cutou
4	د 	$x_{1} = \begin{pmatrix} \mathbf{A} \\ \mathbf{B} \\ \mathbf{B}$				SQUARE FLANGE RECEPTACLE REAR MOUNTING	(TYPE 0)
		X-axis (mm)     Y-axis (mm)       +.000 (0.00)     +.100 (2.54)       +.174 (4.42)     +.024 (0.61)       +.094 (2.39)    148 (3.76)      094 (2.39)    148 (3.76)      174 (4.42)     +.024 (0.61)			ž		ØT
ى ى							Dim ØA ØAA R1 ØT
	L						
						due to a use the Specificatior	I not be liable for any e of the Products wh ns issued by either of sional recommendat
N							Countr FR
							PN: 8D0155
						0-2016 First Release	
					ISS D/ Designed By:	ATE Latest modificat Date:	
					TITLI	E	Stainless Ste
<b>_</b>					SCALE NA		General linear Tolerances: ±
					SOUR	AU WWW	.SOURIAU.C
					FORMAT A3		SOURIAU
l	Н	G	F	E	A3	C	8D015S0
	П	i G	I <b>F</b>				I

