

т	D I	н т	m	0



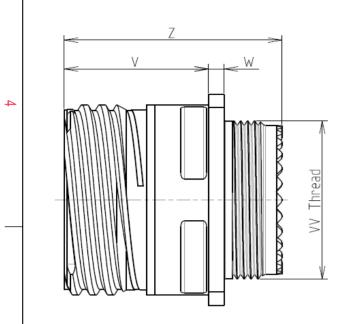

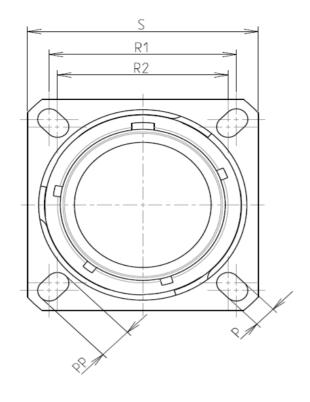

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 15

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
-Durability	: 500 Mating cycles		
-Delivered without Souriau contacts			
-Temperature Range	: −65°C to +175°C		
-Salt Spray	: 500 hours		

: 20.98 g ± 10%

8D 0

G


15

W

05

F

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.39±0.2		
R1	24.61		
R2	23.01		
S	31±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M22x1-6g		

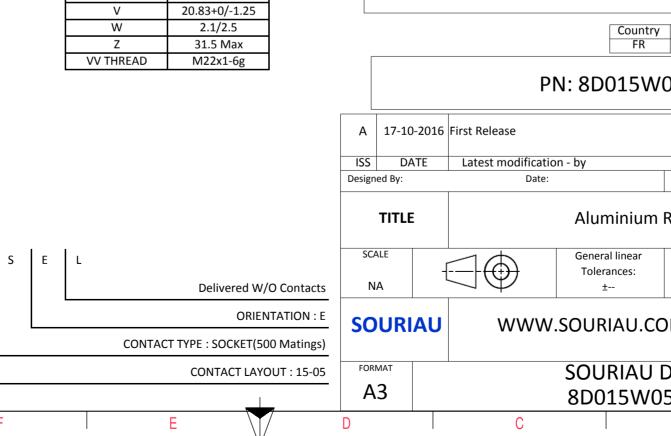

0		σ		A		
						4
LAYOUT SHOWN AS EXAMPLE						
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\ \hline FR \qquad Not Listed}$ PN: 8D015W05SEL						2
First Release						
Latest modificatio Date:	n - by		CUSTON	IER DRAWING	MOD N°	
Aluminium Receptacle 8D series						
\square	General linear Tolerances: ±		NPRD	S / PROJECT 859		1
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
JOUNIAU DINU N			SHEET 1/2			
С		B		А		J

		۵	н т	m	D		0	
		Contact Layout						Panel Cutou
4	د.	$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ &$				SQUARE FLANG	E RECEPTACLE (TYPE O IR MOUNTING)
		Location X-axis Y-axis (mm) (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61)					ØA	
ى ن							Dii ØA R: Ø	A \A 1
						C	JRIAU shall not be due to a use of the pecifications issue (professional r	e Products wh d by either of
N								Countr FR
							PN: 8	3D015W
						-10-2016 First Rel		
					ISS Designed Br		t modification - by Date:	/
					רוד	'LE	A	luminium
<u> </u>					SCALE			eneral linear Folerances: ±
					SOU	RIAU	WWW.SO	URIAU.C
					FORMAT A3			DURIAU D015W(
	H	G	F	E	D		C	

