

т	۵	п –	m	0



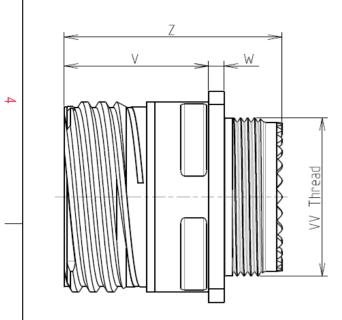

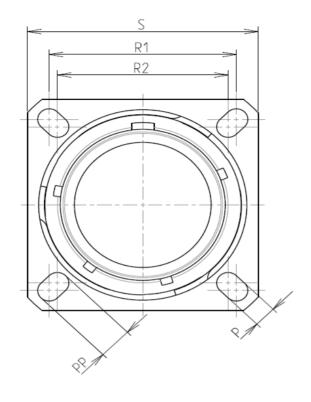

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 15

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				
-Salt Spray	: 500 hours				

: 24.88 g ± 10%

8D 0

G

15

Ζ

05

В


F

D

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.39±0.2			
R1	24.61			
R2	23.01			
S	31±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M22x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

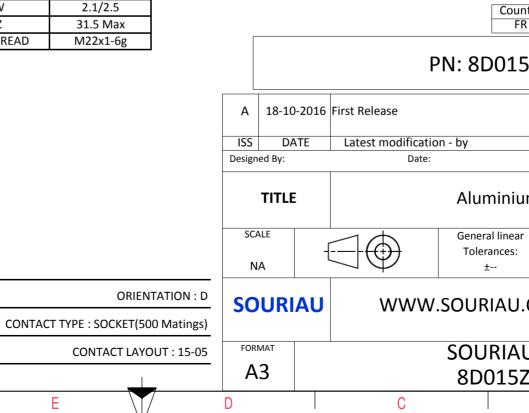

σ	J			Þ			
		0					4
	6	-					
	1						
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1					
		1					
S EXAMPLE							3
S EVAINIATE							
any non-co							
	hich does not comply with of the Parties or by a third party						
idation, tecl							
untry							
FR		Not Li	sted]		2
5Z05BD							
]		
		CUSTO	OMER D	RAWING	MC	D N°	
um Rece	n Receptacle 8D series						
ar		NPF	RDS / PR	OJECT			
			859				1
J.COM	This document is the property of SOURIAU						
	it must not be reproduced or communicated without permission						
U DRO	6 N°				SH	EET	
Z05BD					1	/2	
В	I			А			

		۵	н т	m	D	0	
		Contact Layout					Panel Cutou
4	د ا	$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ &$				SQUARE FLANGE RECEPTA REAR MOUNTIN	CLE (TYPE O)
		Location X-axis Y-axis (mm) (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61)					ØT
ى س							Dim ØA ØAA R1 ØT
	_					SOURIALIS	nall not be liable for any
						due to a the Specificat	use of the Products wh ions issued by either of ressional recommendat
N							Countr FR
					A 18-	10-2016 First Release	PN: 8D0152
						DATE Latest modifie	cation - by ate:
					TITI	LE	Aluminium
-					SCALE NA		General linear Tolerances: ±
					SOUR	RIAU WW	W.SOURIAU.C
					FORMAT A3		SOURIAU 8D015Z0
	Н	G	F	E	D	C	

