

T	G	т	т	D	0



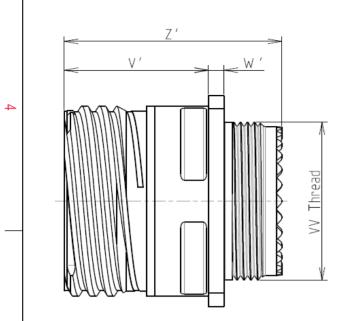

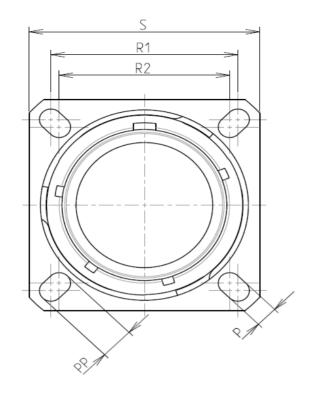

LAYOUT SHOWN AS

Keying Shown as example

L

Е

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite		
	-Shell Plating	: Olive drab Cadmium		
	-Insulator	: Thermoplastic		
-Contacts		: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
-Contact Plating		: Gold over copper Alloy 0.8µm minimum		
-Durability		: 500 Mating cycles		
-Delivered without Souriau contacts				
	-Temperature Range	: -65°C to +175°C		
	-Salt Spray	: 2000 hours		

8D 0

G

17

J

22

S

F

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M25x1-6g		

Delivered W/O Contacts


CONTACT LAYOUT : 17-22

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : E

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

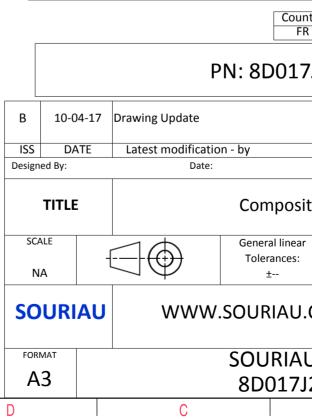

	σ		A		
		I			
		•			
					4
	0	6			
		1			
	1				
S EXA	AMPLE				3
	non-conformit				
er of t	vhich does not comply with of the Parties or by a third party ation, technical notice.)				
untry					
FR	Not Listed				
7J2	22SEL				
		CUSTOME	R DRAWING	MOD N°	-
site	e Receptacle 8D series				
ar	NPRDS / PROJECT				
			59		1
J.CC	COM This document is the property of SOURIAU it must not be reproduced or				
	communicated without permission				-
	J DRG N°SHEET22SEL-C1/2				
522	B		A		J

r	Ŧ	۵	н т	m	D	0		
4		Contact Layout 22				Panel Cute SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING		
 ω	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thickness panel f	for receptacle: Type 0: front m ØA ØA R1	
	-					due to a the Specifica	ØT hall not be liable for a a use of the Products v tions issued by either fessional recommend	
N					В	10-04-17 Drawing Update	Coun FR PN: 8D017	
					ISS Designed	DATE Latest modifi		
_ _					SCALE NA SOL		General linear Tolerances: ±	
					FORMA A3		SOURIAI 8D017J	
	Н	G	F	E	D	C		

