

<b>T</b>	۵	нт – – – – – – – – – – – – – – – – – – –	m	0



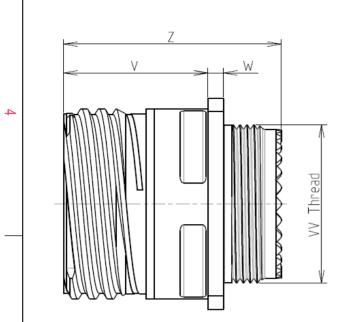

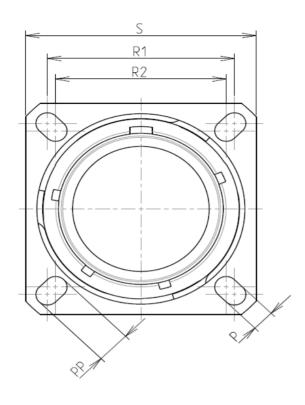

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Passivated			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 500 hours			
	-Mass	: 80.87 g ± 10%			

8D 0

G

17

-

Κ

75

В

F

А


Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


**ORIENTATION : A** 

CONTACT LAYOUT : 17-75

CONTACT TYPE : SOCKET(500 Matings)

Е



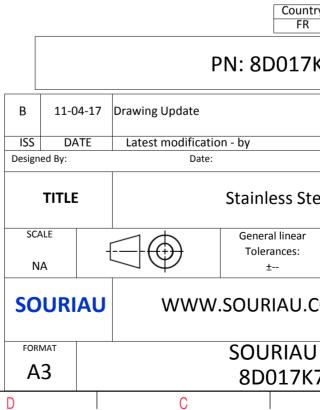

	Ξ		Þ		
					4
					3
AS EXA	AMPLE				
s whic er of t idatio	non-conformit ch does not co he Parties or t on, technical n	mply with by a third par otice.)			
Intry R	Jurisd	liction & Cont Not Listed	trol List		2
7K	75BA				
		CUSTOMF	R DRAWING	MOD N°	
Stee	el Recepta				
ar	NPRDS / PROJECT 859				
				perty of	1
J.CC	I.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
′K7	5BA-C			1/2	J
	В		А		

r	Ŧ	ര	н <b>г</b>	m	U	0	
		Contact Layout				P SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	Panel Cuto
4		75			Σ.	REAR MOUNTING	
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			¥	Max. thickness panel for receptacle: Typ	Ø⊺ pe 0: front m
ω		0 -4.75				Dim ØA ØAA R1 ØT	
	F					SOURIAU shall not be lia	
N						due to a use of the P the Specifications issued b (professional rec	by either
					B 11-04	PN: 8	
					ISS DAT Designed By: TITLE	E Latest modification - by Date:	nless St
_ <b>_</b>					SCALE NA	Gene Tole	eral linear erances: ±
					FORMAT	SOL	JRIAU
	Н	G	F	E	A3 D		0017K

