

т	۵	н <b>п</b>	п	D	0



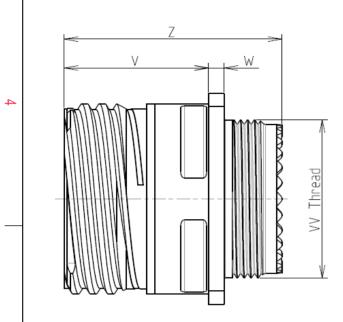

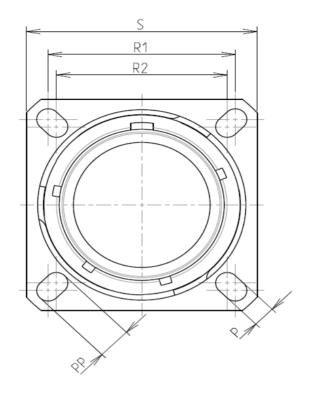

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				
-Salt Spray	: 500 hours				

8D 0

G

17

Ζ

22

А

F

В


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


**ORIENTATION : B** 

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-22



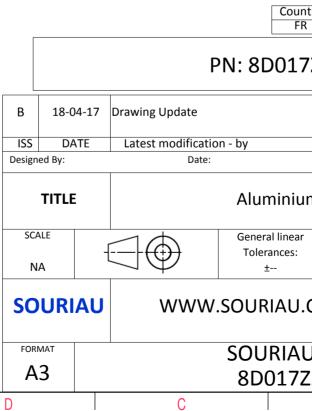

	Ξ	1	А		
		I			
	-				
		0			4
	6	- THE			
7					
		1			
S EX4	AMPLE				3
	non-conformit ch does not co				
er of t	he Parties or b on, technical n	by a third par	ty		
untry FR	Juriso	liction & Cont Not Listed	trol List		2
77'	Z22AB				
12	ZZAD				
	1			MOD N°	
		CUSTOME	R DRAWING		
um	n Receptacle 8D series				
ar	NPRDS / PROJECT				
			59	orthu -f	1
.COM This document is the property of SOURIAU it must not be reproduced or					
		it must not be reproduced or communicated without permission			
	DRG N° SHEET				
'Z2	2AB-C			1/2	J
	В		А		

r	τ	Q	г П	m	D		0	
4		Contact Layout 22				Panel Cuto SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING		
ω	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thicknes	Dim ØA ØAA R1 ØT	
						du	RIAU shall not be liable for ue to a use of the Products ecifications issued by eithe (professional recommer	
N						18-04-17 Drawing I		
					SCALE	By:	Date: Date: Alumini General lines Tolerances	
	H	G	F	E	FORMA A3	т	vww.souriau Souriau 8D017 c	
				$\backslash$	V			

