
т	۵	н п	п	0





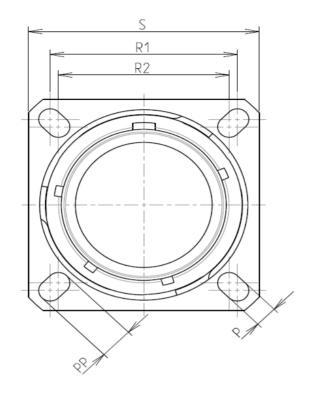

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8 μm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65℃ to +175℃			
-Salt Spray	: 500 hours			

8D 0

G

17

Ζ

22

В

F

Ν


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


ORIENTATION : N

CONTACT LAYOUT : 17-22

CONTACT TYPE : SOCKET(500 Matings)

Е



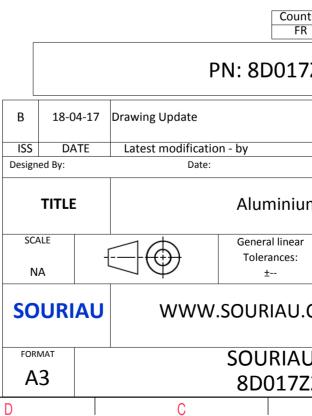

	Φ		Þ		
		1000 H			4
AS EXA	AMPLE				3
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)					
untry FR	Juriso	liction & Cor Not Listed			2
7Z22BN					
				MOD N°	
um	customer drawing Im Receptacle 8D series				
ar	NPRDS / PROJECT				
			859		1
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	J DRG N° SHEET				
ΖΖ.	2BN-C B		A	1/2	J

	τ	Q	н г	m		0	
4		Contact Layout 22				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	Panel Cut
	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thickness panel for receptacle: T	Type 0: front m
	-					SOURIAU shall not be due to a use of the the Specifications issued (professional re	liable for a Products v d by either ecommend
N					B	8-04-17 Drawing Update	Cour FF 8D017
					ISS Designed E TI SCALE	TITLE Date:	
-					NA		JRIAU.
	Н	G	F	E	A3		DURIA D0172
					V	-	

