

|--|



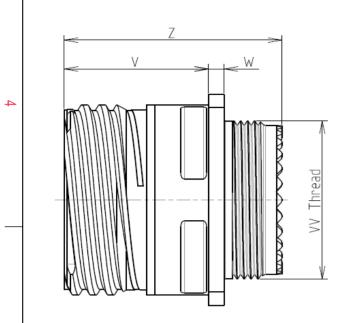

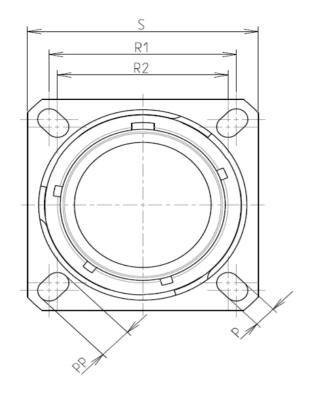

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	-65°C to +175°C			
-Salt Spray	: 500 hours			

8D 0

G

17

Ζ

22

Ρ

F

N L

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


Delivered W/O Contacts


CONTACT LAYOUT : 17-22

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : N



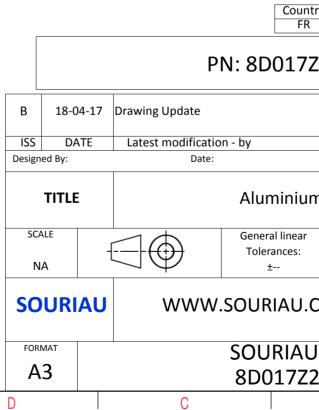

					1	
	Φ		A			
					4	
AS EXA	AMPLE				3	
anvi	non-conformit	ty or damage	7 6			
s whic er of t	ch does not co he Parties or t on, technical n	mply with by a third pa				
untry FR	Jurisd	liction & Co Not Liste			2	
7Z2	2PNL					
				MOD N°		
		CUSTOM	ER DRAWING			
um	m Receptacle 8D series					
ar :		NPRDS	5 / PROJECT 859			
J.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
	2PNL-C			1/2		
	В		А		-	

		۵	г п	m	D	0	
4		Contact Layout 22				SQUARE FLANGE RECEPTACLE REAR MOUNTING	Panel Cut
 ى	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thickness panel for m	Dim ØA ØAA R1
						due to a us the Specificatior	ØT I not be liable for a e of the Products v ns issued by either sional recommend
а					В	18-04-17 Drawing Update	Cour FF PN: 8D017
					ISS Designed TI SCALE	TLE	
_ _					NA		Tolerances: ± V.SOURIAU.
	Н	G	F	E	A3	C	8D017Z
					V		

