
Ξ	വ	н т	m	D	0





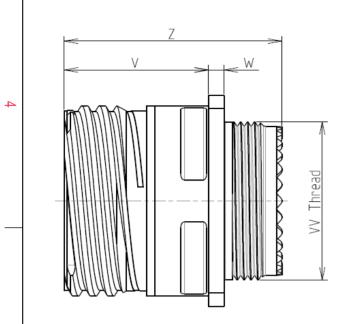

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

8D 0

G

17

Ζ

22

S

F

B L

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


Delivered W/O Contacts


CONTACT LAYOUT : 17-22

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : B



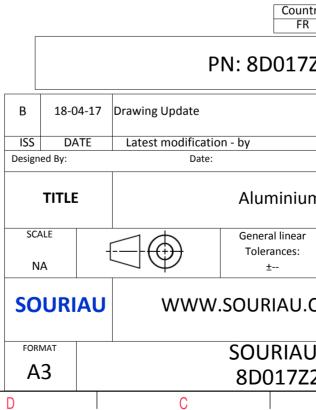

	σ		A			
		I I				
		2				
		0			4	
	6/12	N. MARINA				
	· .					
		1				
	-					
S EXA	AMPLE				3	
any	non-conformit	y or damage				
	ch does not co he Parties or b		ty			
	on, technical n		-1			
untry						
R		Not Listed			2	
7Z22SBL						
		CUSTOME	R DRAWING	MOD N°		
um	Receptacl	e 8D seri	es			
ar	NPRDS / PROJECT 859					
	This document is the property of					
I.CC	.COM SOURIAU it must not be reproduced or					
	communicated without permission U DRG N° SHEET					
	2SBL-C			1/2		
4	B		A		J	

r	<u>т</u>	۵	н г	m	D	0	
4		Contact Layout 22				SQUARE FLANGE RECEPTACLE (T' REAR MOUNTING	Panel Cut
	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thickness panel for recep	ØA Dim ØA ØA ØAA R1
	ŀ					the Specifications i	ØT ot be liable for a f the Products v
0					В	Coun FR PN: 8D017 18-04-17 Drawing Update	
					ISS Designed	DATE Latest modification	Aluminiu
_					SCALE NA SOU		General linear Tolerances: ±
	Н	G	F	E	FORMAT A3	C	SOURIAI 8D0172
	II		I I				I

