

I	D	п	т	0



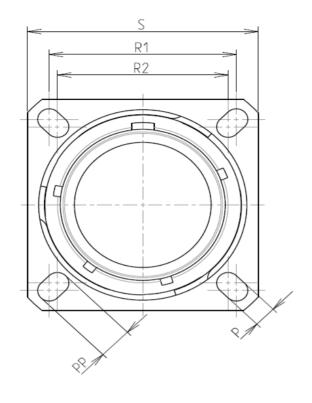



Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 19

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium
	-Shell Plating	: Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum
	-Durability	: 500 Mating cycles
	-Delivered with Souria	u contacts and Accessories
	-Temperature Range	 -65°C to +200°C
	-Salt Spray	: 48 hours
	-Mass	: 31.07 g ± 10%

8D 0

G

19

F

11


А

F

Е

Dim P	Nominal
D	
r	3.25±0.2
PP	4.93±0.2
R1	29.36
R2	26.97
S	36.5±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max

Е

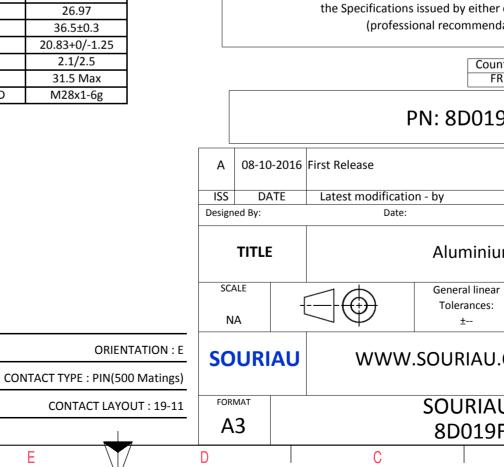

0		Ξ		Þ			
					4		
LAY	YOUT SHOWN AS EXA	AMPLE			3		
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\\hline FR \qquad Not Listed}$ PN: 8D019F11AE							
rst Release					-		
Latest modificatio	n - by			MOD N°			
Date: CUSTOMER DRAWING Aluminium Receptacle 8D series							
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PROJI 859	ECT	1		
Image: Constraint of the property of the property of the property of the property of the produced or the produc							
SOURIAU DRG N° 8D019F11AE-C							
С		B		A			

