

т	۵	<b>п</b>	m	0



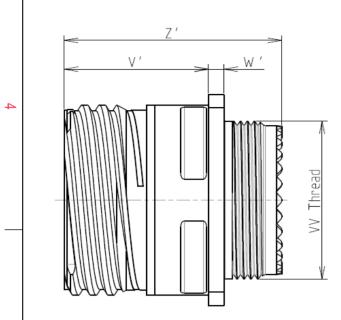



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 19

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65℃ to +175℃			
-Salt Spray	: 2000 hours			

: 25.3 g ± 10%

8D 0

G

19

J

32

А


F

D

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
PP	4.93±0.2				
R1	29.36				
R2	26.97				
S	36.5±0.3				
V'	19.5+1.4/-0				
W'	2.1/3.65				
Z'	32 Max				
VV THREAD	M28x1-6g				

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

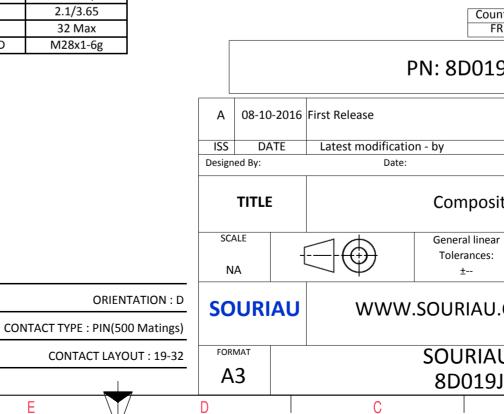

	Β		A				
					4		
S EXA					3		
which er of th	any non-conformity or damage which does not comply with r of the Parties or by a third party dation, technical notice.)						
Intry R	y Jurisdiction & Control List Not Listed						
913	9J32AD						
				MOD N°			
		CUSTOME	R DRAWING		-		
	te Receptacle 8D series						
ar		NPRDS / PROJECT 859					
J.CO	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	U DRG N° SHEET						
1137	AD-C		A	1/2	J		
	-						

