

т	۵	н т	m	0



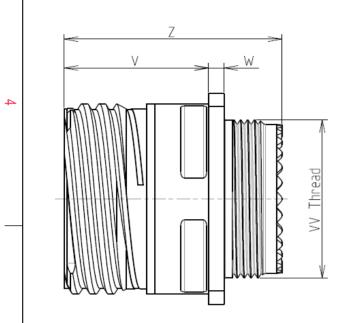

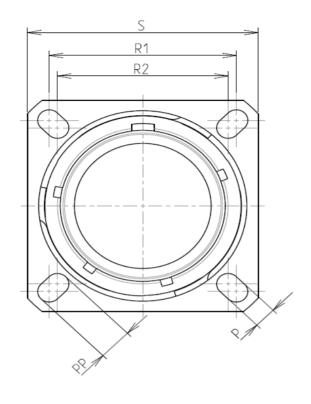

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 48 hours

8D 0

G

21

F

72

В

F

D

Dim	Nominal
Р	3.25±0.2
РР	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M31x1-6g


ORIENTATION : D

CONTACT LAYOUT : 21-72

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

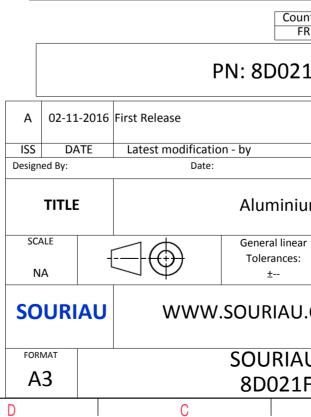

	Φ		Þ			
	R				4	
AS EXAM	MPLE				3	
s which er of th	does not co	by a third part	Ξy			
Intry R	Jurisd	iction & Cont Not Listed	rol List		2	
				MOD N°		
um R	CUSTOMER DRAWING					
ar :	NPRDS / PROJECT 859					
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
UDRG N° SHEET F72BD-C 1/2						
	B		А		J	

	τ	۵	нт. П	m		0
4		Contact Layout 72				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	2#4 Power 6#16 21-72 X Y			¥	
S	A B C D E F G H	0 6.19 8.5 4.3 6.25 0 8.5 -4.3 0 -6.19 -8.5 -4.3 -6.25 0 -8.5 4.3				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any
2						due to a use of the Products wh the Specifications issued by either of (professional recommendati Country FR PN: 8D021F
					A 02-11-202 ISS DATE Designed By:	16 First Release Latest modification - by Date:
4					SCALE NA	Aluminium General linear Tolerances: ±
					FORMAT A3	SOURIAU 8D021F7
	Н	G	F	E	D	C

