т	۵	н п	m	C C







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65℃ to +175℃			
-Salt Spray	: 2000 hours			
	-Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Souriau -Temperature Range			

: 45.2 g ± 10%

8D 0

G

21

J

16

В

F

Ν

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	31.75		
R2	29.36		
S	39.7±0.3		
V	18.7+1.4/-0		
W'	2.1/4.35		
Ζ'	32 Max		
VV THREAD	M31x1-6g		


ORIENTATION : N

CONTACT LAYOUT : 21-16

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

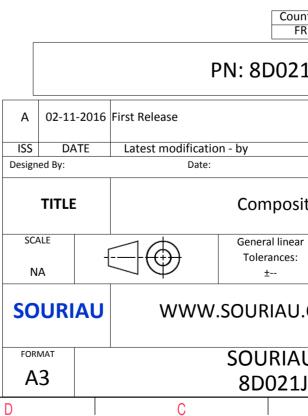

	Ξ		A		
		I			
					4
S EXA	AMPLE				3
whic er of t	non-conformit h does not co he Parties or t n, technical n	mply with by a third part	у		
intry R	Jurisd	liction & Cont Not Listed	rol List		2
1J1	J16BN				
				MOD N°	-
		CUSTOMER	R DRAWING		-
site	e Receptacle 8D series				
ar		NPRDS / PROJECT 859			
I.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°	1		SHEET	
J1(5BN-C B		A	1/2	J

r	T	۵	וד	m	D	0
		Contact Layout				Panel Cutou
4		$ \begin{array}{c} & & & & \\ & & & & \\ & & & & \\ $				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Contact position ID Loca A +.118 (3.00) B +.271 (6.88) C +.341 (8.66) D +.308 (7.82) E +.182 (4.62) F +.000 (0.00) G 182 (4.62) H 308 (7.82)	Contacts (Insert arrangement 21-16) tion Location Y-axis ID X-axis Y-axis +.322 (8.18) J 341 (8.66) +.036 (0.91) +.211 (5.36) K 271 (6.88) +.2211 (5.36) +.056 (0.91) L 118 (3.00) +.322 (8.18) 150 (3.81) M +.000 (0.00) +.175 (4.391) 290 (7.37) N +.154 (3.91) +.024 (1.57) 343 (8.71) P .094 (2.39) 122 (3.10) 150 (3.81) S 154 (3.91) +.062 (1.57)				
ω		nther of Size contacts Service Contact Supersedes intacts contacts rating Iocation 16 II All MS20055-16				ØA ØAA R1 ØT
	 					
2						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat Country FR
						PN: 8D021J
_						11-2016 First Release DATE Latest modification - by Date:
					SCALE	General linear
					NA	Tolerances:
					SOUF	
					FORMAT A3	SOURIAU 8D021J1
l	Н	G	F	E	D	C
					¥	

