
 (L)	 	0	0





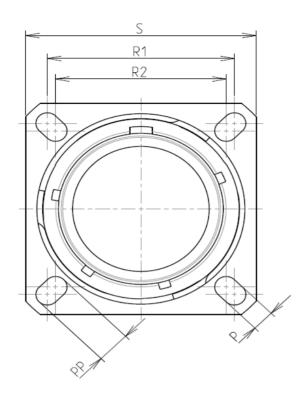

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 21

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 500 hours -Salt Spray

: 80.57 g ± 10%

8D 0

G

21

S

39

А

F

С

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
PP	4.93±0.2				
R1	31.75				
R2	29.36				
S	39.7±0.3				
V	20.07+0/-1.25				
W	2.1/3.2				
Z	31.5 Max				
VV THREAD	M31x1-6g				


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 21-39

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

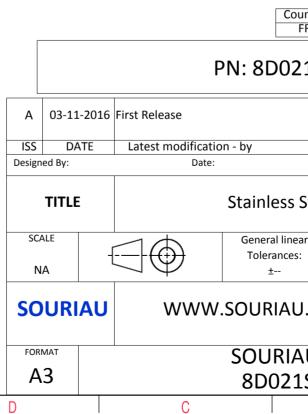

	Φ		A			
					4	
AS EXA	MPLE				3	
s whick er of th ndation untry FR	non-conformit h does not co he Parties or b n, technical no Jurisd	mply with by a third par	ty		2	
		CUSTOME	R DRAWING	MOD N°		
Stee	Steel Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
J.CO	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 9AC-C			SHEET		
	B		A	,	J	

