

	т	۵	н <b>п</b>	m	0
1			1	I	1





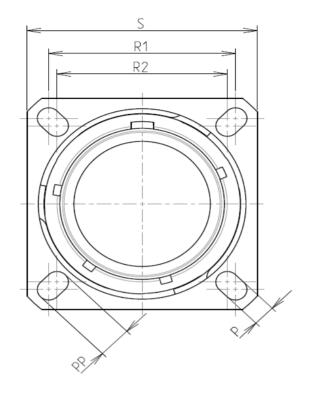

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Black Zinc Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered with Souria	u contacts and Accessories
-Temperature Range	: -65°C to +175℃

: 500 hours

8D 0

G

21

Ζ

77

А

F

Е


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M31x1-6g


ORIENTATION : E

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 21-77



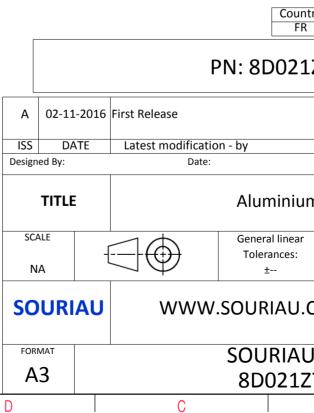

σ		Þ					
			4				
S EXAMPLE			3				
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)							
Intry Juriso	diction & Control List Not Listed		2				
1Z77AE							
		MOD N°					
	CUSTOMER DRAWIN						
um Receptacle 8D series							
ar	NPRDS / PROJECT 859						
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
U DRG N° SHEET Z77AE-C 1/2							
B		A	J				

