
_				
Ŧ	Q	П	m	C C





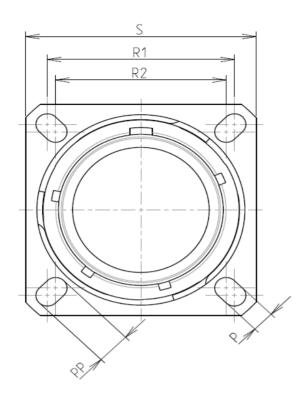

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 25

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel		
	-Shell Plating	: Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souriau contacts and Accessories			
	-Temperature Range	- 65°C to +200°C		
	-Salt Spray	: 500 hours		

: 99.25 g ± 10%

8D 0

G

25

S

61

А

F

А


Connector dimension				
Dim	Nominal			
Р	3.91±0.2			
PP	6.15±0.2			
R1	38.1			
R2	34.93			
S	46±0.3			
V	20.07+0/-1.25			
W	2.1/3.2			
Z	31.5 Max			
VV THREAD	M37x1-6g			

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 25-61

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

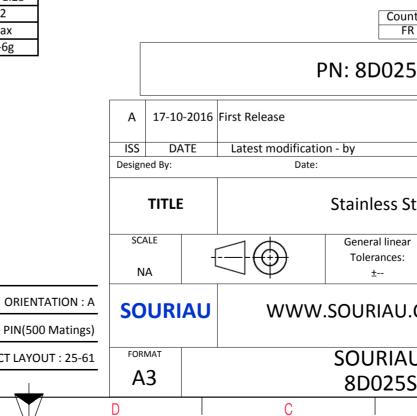

	Φ		A			
					4	
	AMPLE				3	
whic er of t	non-conformit ch does not co he Parties or t on, technical no	mply with by a third par				
untry FR	Jurisd	iction & Con Not Listed	trol List		2	
556	S61AA					
		CUCTON		MOD N°		
Stee	CUSTOMER DRAWING Steel Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
			cument is the pro	perty of	1	
J.CC	.COM SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
S6	1AA-C	I	_	1/2]	
	В		А			

