
Ŧ	۵	П	m	D	0





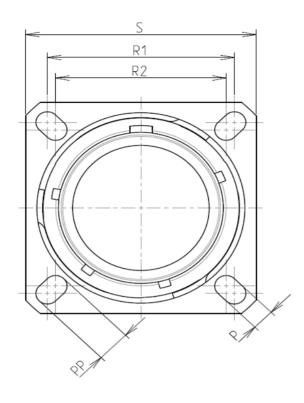

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 25

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel
	-Shell Plating	: Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
N	-Contact Plating	: Gold over copper Alloy 0.8μm minimum
	-Durability	: 500 Mating cycles
	-Delivered with Souria	u contacts and Accessories
	-Temperature Range	65°C to +200°C
	-Salt Spray	: 500 hours
	-Mass	: 126 g ± 10%

8D 0

G

25

S

61

В

F

E


Dim	Nominal	
Р	3.91±0.2	
PP	6.15±0.2	
R1	38.1	
R2	34.93	
S	46±0.3	
V	20.07+0/-1.25	
W	2.1/3.2	
Z	31.5 Max	
/V THREAD	M37x1-6g	


ORIENTATION : E

CONTACT LAYOUT : 25-61

CONTACT TYPE : SOCKET(500 Matings)

Е



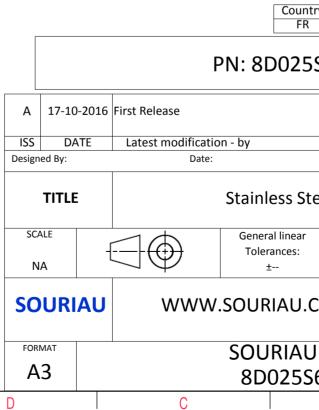

	Φ		A			
					4	
AS EXA	AMPLE				3	
s which er of t indation untry FR	non-conformit ch does not co che Parties or t on, technical n Jurisc	mply with by a third part			2	
	1			MOD N°		
Stee	CUSTOMER DRAWING eel Receptacle 8D series NPRDS / PROJECT 859					
		This doc	ument is the prop	perty of	1	
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
56	1BE-C			1/2	J	
	В		А			

