

I I I I I I I I I I I I I I I I I I I	G	нт. П	m	0



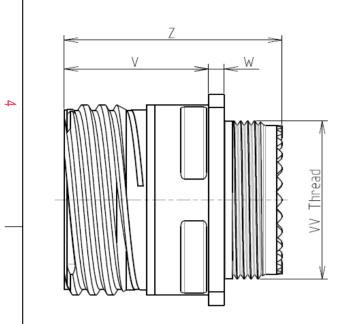

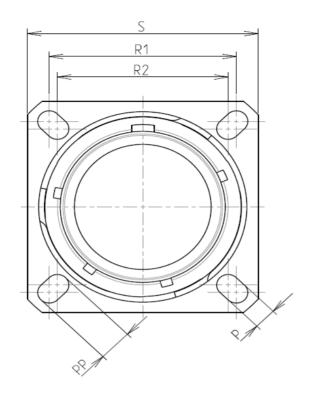

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 25

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

Ì	-Shell Material	: Aluminium		
	-Shell Plating	: Black Zinc Nickel		
-Insulator		: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
-Contact Plating -Durability		: Gold over copper Alloy 0.8 μm minimum		
		: 500 Mating cycles		
	-Delivered with Souriau contacts and Accessories			
-Temperature Range		: -65°C to +175°C		
-Salt Spray		: 500 hours		

: 48.51 g ± 10%

8D 0

G

25

Ζ

61

А

F

D


Dim	Nominal	
Р	3.91±0.2	
РР	6.15±0.2	
R1	38.1	
R2	34.93	
S	46±0.3	
V	20.07+0/-1.25	
W	2.1/3.2	
Z	31.5 Max	
VV THREAD	M37x1-6g	


ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 25-61



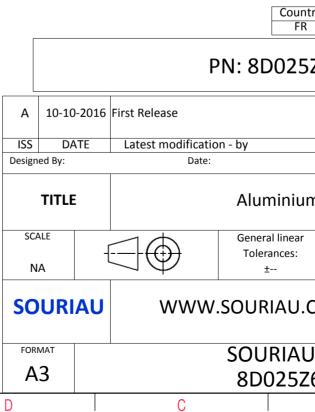

σ		A					
				3			
S EXAMPLE							
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)							
Intry Jurisc	Jurisdiction & Control List Not Listed						
5Z61AD							
			MOD N°				
customer drawing							
ar	NPRDS / PROJECT						
		59 ument is the prop	perty of	1			
This document is the property of SOURIAU it must not be reproduced or communicated without permission							
UDRG N° SHEET							
Z61AD-C		A	1/2	J			
2							

