
ר בר			0	Φ	A	
Image: second	2 X					4
ω	T. T		LAYOUT SHOW	IN AS EXAMPLE		3
	Keying Shown as example					
 CHARACTERISTICS -Standard : Based on NIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +175°C 	Connector dimensionDimNominalØS32.5 MaxZ'31.5 MaxVV THREADM22x1-6g	A 19-10-2016	the Specifications issued by e (professional recom	ucts which does not comply ither of the Parties or by a mendation, technical notice Country Jurisdictio	/ with third party	
-Salt Spray : 2000 hours		ISS DATE	Latest modification - by		MOD N	1°
		Designed By:	Date: CUSTOMER DRAWING Composite Plug 8D series			
BASIC SERIES: 8D 5 - 15 SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact	U 05 H A ORIENTA		General Toleran ±	linear Ices:	NPRDS / PROJECT 859 This document is the property of SOURIAU	
SHELL SIZE : 15 PLATING : J = Olive drab Cadmium	CONTACT TYPE : PIN (1500 N CONTACT LAYOUT	Natings)	SOUR	IAU DRG N°	it must not be reproduced or communicated without permission SHEET	
H G	F E		<u>C</u>	15J05HA-C B	1/2 A	

	Ŧ	۵	г	m	D	0
4		Contact Layout $ \begin{pmatrix} \bullet & \bullet \\ \bullet & \bullet \\\bullet \\\bullet & \bullet \\\bullet \\\bullet & \bullet \\\bullet \\$				
		X-axis (mm) Y-axis (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 994 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61)				
ω						
						SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend
N					A 19-10-202	PN: 8D51
					ISS DATE Designed By: TITLE	Latest modification - by Date:
-					SCALE NA SOURIAU	General linear Tolerances: ±
					FORMAT A3	SOURIA 8D515.
	Н	G	l F	E \	D	C

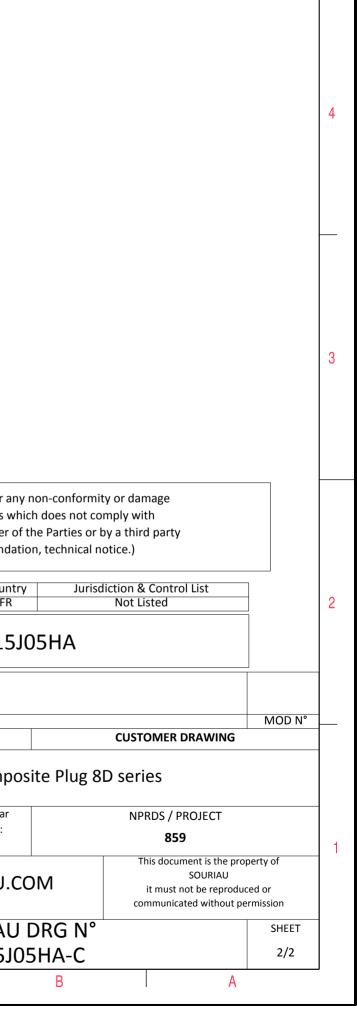

 \triangleright

σ