

ſ	т	۵	П	п	C		0	
4		V Thread						DWN AS EXA
			Keying Shown as	example				
	CHARACTERISTICS			Connector dimension Dim Nominal				
N	-Standard : Based on MIL-DTL-38999 Serie-Shell Material: Composite-Shell Plating: Olive drab Cadm-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastome-Contact Plating: Gold over copper-Durability: 500 Mating cycl-Delivered with Souriau contacts and Acce-Temperature Range: -65°C to +175°C-Salt Spray: 2000 hours-Mass: 28.9 g ± 10%	nium er er Alloy 0.8µm minimum es essories		ØS 32.5 Max Z' 31.5 Max VV THREAD M22x1-6g		ISS DATE	6 First Release Latest modification - by	oducts which y either of th
	BASIC SERIES: 8D SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Conta SHELL SIZE : 15 PLATING : J = Olive drab Cadmiur	n	97 B N	CONTACT TYPE : SOCKET CONTACT L	IENTATION : N (500 Matings) AYOUT : 15-97	Designed By: TITLE SCALE NA SOURIAU FORMAT A3	Gener Tole WWW.SOUF SOL 8D	Composi ral linear rances: ± RIAU.CO JRIAU E 515J97
	H	G	F	E	τ Γ		С	

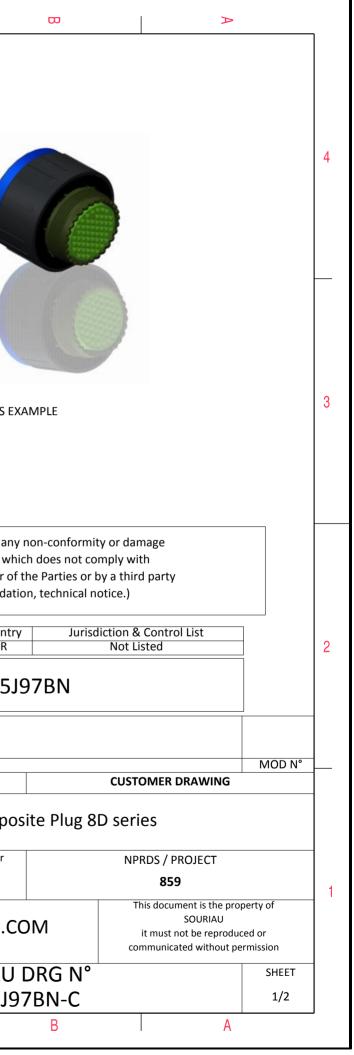

	T	െ	וד	m	D	0
		Contact Layout				
4	د.	$ \begin{array}{c} & & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & $				
	Contact position ID Locati X-avis (mm) A +.065 (1.65) B +.178 (4.52) C +.230 (5.84) D +.178 (4.52) E +.065 (1.65) F 089 (2.26)	Y-axis (mm) position ID X-axis (mm) Y-axis (mm) + 234 (5.94) G - 207 (5.26) - 0.95 (2.41) + 178 (4.52) H - 234 (5.94) + 0.65 (4.65)				
	size no. cor	Inber of tacts Size contacts Service rating Contact location Supersedes 4 16 I C, G, L, M MS20052-97 8 20 I All others MS20052-97	-			
ယ						
						SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
					A 19-10	-2016 First Release
					ISS DA Designed By:	TE Latest modification - by Date:
					SCALE	Compo General linear
-					NA	Tolerances:
					FORMAT	
					A3	SOURIAU 8D515J9
	Н	G	F	E	D	C

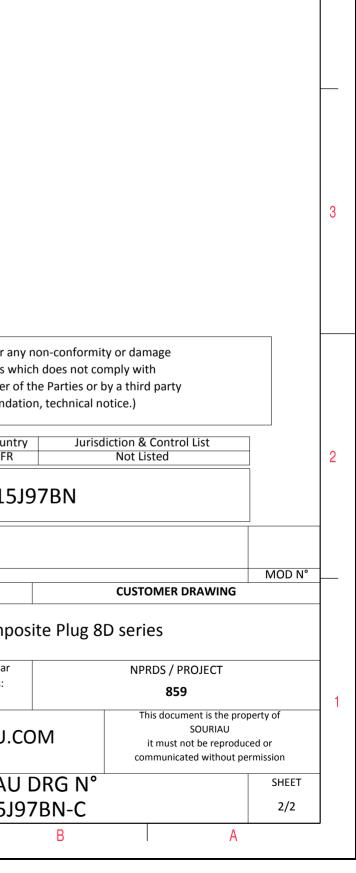

4