
ד ס ד	I m		0	σ	A	
						_
			LAYOUT SHOWN AS E	XAMPLE		
Kt	eying Shown as example					
CHARACTERISTICS	Connector dimension]				
 -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium -Shell Plating : Black Zinc Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum 	DimNominalØS41.7 MaxZ31 MaxVV THREADM31x1-6g		SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either of (professional recommendat	hich does not comply wi f the Parties or by a third tion, technical notice.)	th d party Control List	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D5212			
-Temperature Range : -65°C to +175°C -Salt Spray : 500 hours		A 12-10-2016	First Release			
		ISS DATE Designed By:	Latest modification - by Date:	CUST	MOI OMER DRAWING	D N° _
	TITLE Aluminium Plug 8D series				es	
BASIC SERIES: 8D 5 - 21 Z 42 SHELL TYPE : Plug with RFI Shielding	P C	SCALE	General linear Tolerances:		RDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21	ORIEN CONTACT TYPE : PIN(50	ITATION : C SOURIAU	WWW.SOURIAU.C	OM	his document is the property of SOURIAU it must not be reproduced or mmunicated without permission	
PLATING : Z = Black Zinc Nickel	CONTACT LAY		SOURIAU 8D521Z4	DRG N°	SHE	EET
H G F	E		C 8D52124	42PC-C B	A	-

	т	۵	г	m	U	0	
4		Contact Layout 42					
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					
ى ى							
						SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recon	oducts wh either o mmendat
N						PN: 80	Countr FR
					A 12-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
_					SCALE NA	Genera Tolera	Alumin al linear ances:
						SOU	RIAU
	Н	G	F	E	A3 D	8D5	521Z4

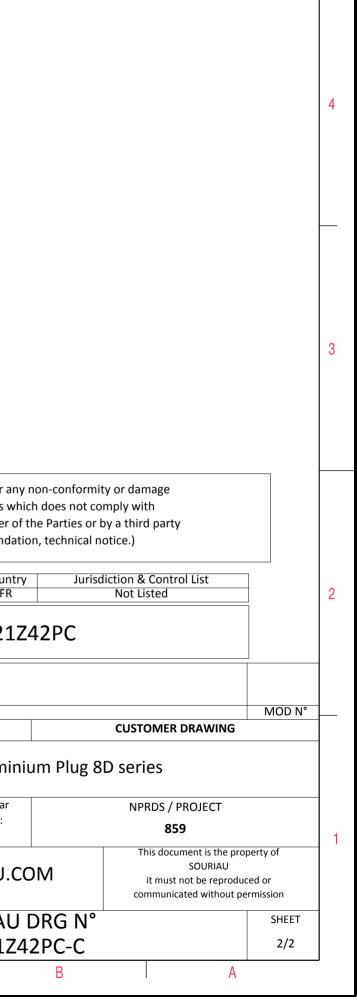

 \triangleright

σ