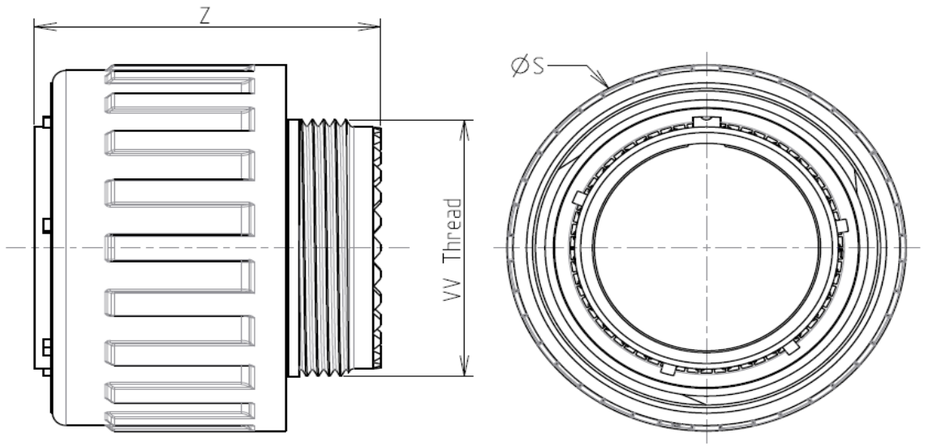

Keying Shown as example

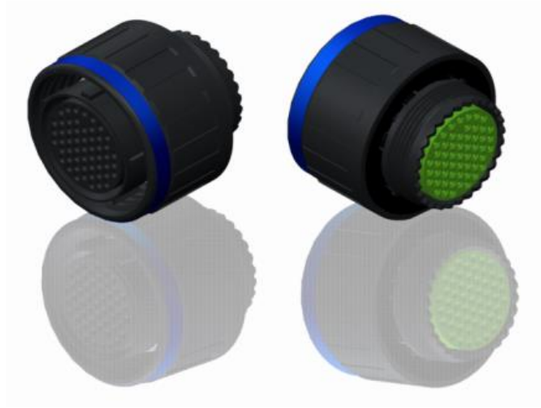

LAYOUT SHOWN AS EXAMPLE

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III
-Shell Material : Composite
-Shell Plating : Without Plating
-Insulator : Thermoplastic
-Contacts : Copper Alloy
-Seals & Grommet : Silicon Elastomer
-Contact Plating : Gold over copper Alloy 0.8µm minimum
-Durability : 500 Mating cycles
-Delivered with Souriau contacts and Accessories
-Temperature Range : -65°C to +175°C
-Salt Spray : 2000 hours

Connector dimension	
Dim	**Nominal**
ØS	44.9 Max
Z	31 Max
VV THREAD	M34x1-6g

BASIC SERIES:	8D	5	-	23	X	06	B	D	
SHELL TYPE : Plug with RFI Shielding									
CONTACT TYPE : Standard Crimp Contact									ORIENTATION : D
SHELL SIZE : 23									CONTACT TYPE : SOCKET(500 Matings)
PLATING : X = Without Plating									CONTACT LAYOUT : 23-06

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D523X06BD

ISS	DATE	Latest modification - by	MOD N°
A	07-10-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Composite Plug 8D series

SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

FORMAT A3 | SOURIAU DRG N° 8D523X06BD-C | SHEET 1/2

Contact Layout



6#8 Concentric
Twinax
Service M

23-06		
Ctc	X	Y
A	0	9.24
B	8.81	2.87
C	5.43	-7.49
D	-5.43	-7.49
E	-8.81	2.87
F	0	0

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D523X06BD

ISS	DATE	Latest modification - by	MOD N°
A	07-10-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Composite Plug 8D series

SCALE NA

General linear Tolerances: ±--

NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

FORMAT A3

SOURIAU DRG N° 8D523X06BD-C