

F

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 25-43

FORMAT

A3

С

D

: 2	.5				
:	S =	Nickel			

G

SHELL SIZE


PLATING

Н

		ω		Þ				
						4		
		Alle A				4		
1			\$					
			1					
1 ^ V(OUT SHOWN AS EX					3		
all not be liable for any non-conformity or damage use of the Products which does not comply with ons issued by either of the Parties or by a third party essional recommendation, technical notice.)								
	Country Jurisdiction & Control List							
	FR Not Listed							
PN: 8D525S43AA								
atior	n - by				MOD N°			
te:			CUSTC	MER DRAWING				
	Stainless	Steel Plug	8D se	ries				
	General linear		NPR	DS / PROJECT				
	Tolerances: ±			859		1		
This document is the property of								
W.SOURIAU.COIVI it must not be reproduced or								
	COLLDLALL DDC NI ^o							
	SOURIAU DRG N°				SHEET			
	8D525S4		T		1/2			
		В		А				

т	Q	н г	т	D	0

Contact Layout



4

ယ

N

_

-


Contacts (Insert arrangement 25-43)								
Contact	Loca	ation		Location				
position	X-axis	Y-axis	Contact position ID	X-axis	Y-axis			
ID	(mm)	(mm)	position iD	(mm)	(mm)			
Α	+.069 (1.75)	+.531 (13.49)	Z	069 (1.75)	+.531 (13.49)			
В	+.203 (5.16)	+.495 (12.57)	a	+.172 (4.37)	+.344 (8.74)			
С	+.324 (8.23)	+.425 (10.80)	b	+.258 (6.55)	+.172 (4.37)			
D	+.424 (10.77)	+.326 (8.28)	C	+.344 (8.74)	+.000 (0.00)			
E	+.493 (12.52)	+.205 (5.21)	<u>d</u>	+.344 (8.74)	172 (4.37)			
F	+.531 (13.49)	+.069 (1.75)	e	+.172 (4.37)	344 (8.74)			
G	+.531 (13.49)	069 (1.75)	<u>f</u>	+.000 (0.00)	344 (8.74)			
н	+.493 (12.52)	205 (5.21)	g	172 (4.37)	344 (8.74)			
J	+.424 (10.77)	326 (8.28)	h	344 (8.74)	172 (4.37)			
K	+.324 (8.23)	425 (10.80)	k	344 (8.74)	+.000 (0.00)			
L	+.203 (5.16)	495 (12.57)	m	258 (6.55)	+.172 (4.37)			
М	+.000 (0.00)	531 (13.49)	n	172 (4.37)	+.344 (8.74)			
N	203 (5.16)	495 (12.57)	p	+.000 (0.00)	+.344 (8.74)			
Р	324 (8.23)	425 (10.80)	q	+.086 (2.18)	+.172 (4.37)			
R	424 (10.77)	326 (8.28)	<u>r</u>	+.172 (4.37)	+.000 (0.00)			
S	493 (12.52)	205 (5.21)	S	+.172 (4.37)	172 (4.37)			
Т	531 (13.49)	069 (1.75)	<u>t</u>	+.000 (0.00)	172 (4.37)			
U	531 (13.49)	+.069 (1.75)	u	172 (4.37)	172 (4.37)			
V	493 (12.52)	+.205 (5.21)	<u>v</u>	172 (4.37)	+.000 (0.00)			
W	424 (10.77)	+.326 (8.28)	w	086 (2.18)	+.172 (4.37)			
Х	324 (8.23)	+.425 (10.80)	x	+.000 (0.00)	+.000 (0.00)			
Y	203 (5.16)	+.495 (12.57)						

Shell size	Arrangement no.	Number of contacts	Size contacts	Service rating	Contact location	Supersedes
25	-43	20	16	1	<u>a,b,c,d,e,f,q,h,k,m,</u> n,p,q,r,s,t,u,v,w,x	MS20057-43
		23	20		All others	

G

F

SOURIAU shall due to a use the Specification (profese

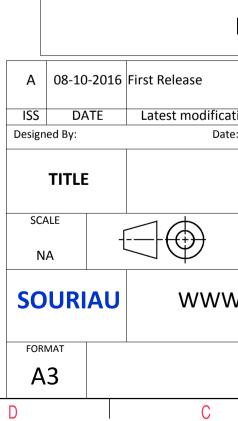

Е



		σ		A		
						4
						3
use of the Pro ons issued by essional reco	oducts whick either of th	n does not co ne Parties or n, technical n Jurisc	by a third part			2
ation - by ^{te:} Sta	ainless S	teel Plug	сиятомея 8D series	R DRAWING	MOD N°	
General linear NPRDS / PROJECT Tolerances: 859 ± This document is the property of SOURIAU V.SOURIAU.COM it must not be reproduced or communicated without permission						1
SOURIAU DRG N°SHEET8D525S43AA-C2/2BA						
	·	<u> </u>	·			